


16 AWG 2 Conductor Plenum Fire Alarm Cable

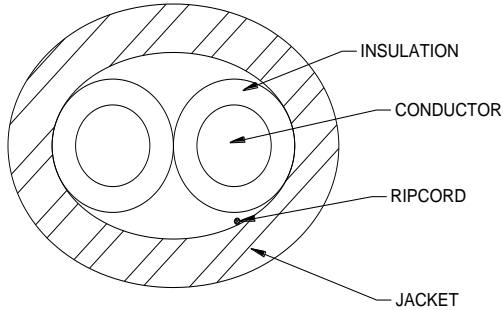

1. Construction:

- 1.1. Conductors: 16 AWG Solid Bare Copper 0.051” Nominal Diameter
- 1.2. Insulation: Plenum PVC, 0.065” Nominal Diameter
- 1.3. Color Code: Black & Red
- 1.4. Cable: Cable 2 Conductors at a 6” LHL
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Green Plenum PVC, 0.158” Nominal Diameter

1.7. Jacket Print:

COMTRAN 16 AWG FPLP/CL3P (UL) OR CMP
C(UL)US RoHS (01-12345) 000002

Sequential Footage Markings Every Two Feet

2. Compliance:

- 2.1. C(UL)US Listed Type CMP
- 2.2. UL Listed Type FPLP/CL3P
- 2.3. UL Subject 444 Communications Cables
- 2.4. UL1424, Power Limited Fire Alarm Cable
- 2.5. UL 13, Power Limited Circuit Cable
- 2.6. NFPA 262 (UL 910), Plenum Flame Test
- 2.7. NEC Article 760, 725 and 800
- 2.8. California State Fire Marshal Approved
- 2.9. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Mutual Capacitance: 27 pF/FT Nominal @ 1 KHz
- 3.2. DC Resistance: 4.02 Ω/1000 FT Nominal @ 20°C

TITLE:		DESCRIPTION:			COMTRAN		COMTRAN <small>Innovative Systems. Engineered Solutions.</small> <small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>		
DS32529		16 AWG 2 Conductor Plenum Fire Alarm Cable			330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839				
Rev	Date	Detail	Eng.	App.					
5	01/09/19	Change logo and basic corrections	SM	PB					
4	03/18/16	Update to current format; add drawing	PB	RN	7				
3	10/30/06	Tri rate and add RoHS to print; Add lay	2me	RHW					
2	07/12/05	Add traceability	2me	RHW					
1	06/27/03	New CTC# Green Jacket	2me	RHW					

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document