


18 AWG 2 Conductor Plenum Fire Alarm Cable

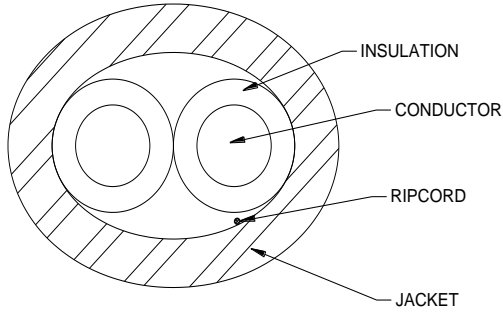

1. Construction:

- 1.1. Conductors: 18 AWG Solid Bare Copper 0.040” Nominal Diameter
- 1.2. Insulation: Plenum PVC, 0.054” Nominal Diameter
- 1.3. Color Code: Black & Red
- 1.4. Cable: Cable 2 Conductors at a 6” LHL
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Yellow Plenum PVC, 0.136” Nominal Diameter
- 1.7. **Jacket Print:**
COMTRAN 18 AWG FPLP/CL3P (UL) OR CMP
C(UL)US RoHS (01-12345) 000002

Sequential Footage Markings Every Two Feet

2. Compliance:

- 2.1. C(UL)US Listed Type CMP
- 2.2. UL Listed Type FPLP/CL3P
- 2.3. UL Subject 444 Communications Cables
- 2.4. UL1424, Power Limited Fire Alarm Cable
- 2.5. UL 13, Power Limited Circuit Cable
- 2.6. NFPA 262 (UL 910), Plenum Flame Test
- 2.7. NEC Article 760, 725 and 800
- 2.8. California State Fire Marshal Approved
- 2.9. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Mutual Capacitance: 31 pF/FT Nominal @ 1 KHz
- 3.2. DC Resistance: 6.7 Ω/1000 FT Nominal @ 20°C

TITLE:		DESCRIPTION:		COMTRAN		COMTRAN <small>Innovative Systems. Engineered Solutions.</small>	
DS33293		18 AWG 2 Conductor Plenum Fire Alarm Cable		330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		<small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>	
Rev	Date	Detail	Eng.	App.			
4	01/17/19	Change logo and basic corrections	SM	WC			
3	03/18/16	Update to current format; add drawing	PB	RN			7
2	10/27/06	Add RoHS to print and Tri rate	2me	RHW			
1	11/03/03	New	2me	RHW			

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document