


14 AWG 2 Conductor Riser Fire Alarm Cable

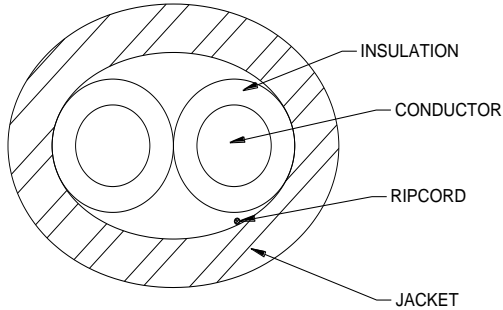

1. Construction:

- 1.1. Conductors: 14 AWG Solid Bare Copper 0.064" Nominal Diameter
- 1.2. Insulation: SR-PVC, 0.078" Nominal Diameter
- 1.3. Color Code: Black & Red
- 1.4. Cable: Cable 2 Conductors at a 6" LHL
- 1.5. Ripcord: Ripcord located under Jacket
- 1.6. Jacket: Red SR-PVC, 0.192" Nominal Diameter
- 1.7. **Jacket Print:**
COMTRAN 14 AWG FPLR/CL3R (UL) RoHS
(01-12345) 000002

(01-12345) = Traceability Code
Sequential Footage Markings Every Two Feet

2. Compliance:



- 2.1. UL Listed Type FPLR/CL3R
- 2.2. UL1424, Power Limited Fire Alarm Cable
- 2.3. UL 13, Power Limited Circuit Cable
- 2.4. UL 1666, Riser Flame Test
- 2.5. NEC Article 760, 725
- 2.6. California State Fire Marshal Approved
- 2.7. RoHS Compliant

3. Electrical Characteristics:

- 3.1. Mutual Capacitance: 37 pF/FT Nominal @ 1 KHz
- 3.2. DC Resistance: 2.6 Ω /1000 FT Nominal @ 20°C

4. Physical Characteristics:

- 4.1. Cable Weight: 32 Lbs./1000 Ft. Nominal

TITLE:		DESCRIPTION:		COMTRAN 330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839		 COMTRAN <small>Innovative Systems. Engineered Solutions.</small>  <small>A Marmon Wire & Cable/Berkshire Hathaway Company</small>	
DS38700		14 AWG 2 Conductor Riser Fire Alarm Cable					
Rev	Date	Detail	Eng.	App.			
10	12/21/18	Change logo and basic corrections	SM	PB			
9	7/11/18	Updated OD (from 7.2mil wall) and jacket OD.	DG	WC			
8	04/17/18	Added weight	PB	WC			
7	03/23/16	Update to current format; add drawing	PB	RN			
6	07/19/06	Dual rate and add RoHS to print; revise lay	2me	RHW			
5	05/05/05	Revised and redrawn	2me	RHW			

Comtran reserves the right to change the information above without prior notification. Comtran assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document